



LEDestá
premium lighting

CATALOGUE Nr.7





PRODUCT CONTENTS

03 **LED OUTDOOR WALL LIGHT**

17 **LED INDOOR WALL LIGHT**

22 **LED YARD LAWN LIGHT**

26 **LED STEP LIGHT**

27 **LED POOL LIGHT**

LED WALL LAMP





Model NO.	A30
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	125*110*260mm



Model NO.	A31
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	125*125*260mm



Model NO.	A32
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	125*125*260mm



Model NO.	A33
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	125*115*260mm



Model NO.	A40
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	200*160*55mm



Model NO.	A41
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	200*160*55mm



Model NO.	A42
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	200*160*55mm



Model NO.	A43
Power	12W 5730SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	200*160*55mm



Model NO.	R160-S
Power	10W COB Square IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW/NWWW
Shell	Black
Material	Aluminum+PC Cover
Size	160*160*100mm



Model NO.	R160-R
Power	10W COB Round IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	70~80LM/W Ra>80
Color.T	WWW
Shell	Black
Material	Aluminum+PC Cover
Size	200*160*55mm



Model NO.	A160
Power	5W 2835SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	180°
Lumen	100~110LM/W Ra>80
Color.T	WWW/NWWW
Shell	White/Black
Material	Aluminum Alloy
Size	160*80*160(H)mm



Model NO.	A90
Power	2*5W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120° up&down
Lumen	70~80LM/W Ra>80
Color.T	WWW/NWWW
Shell	White/Black
Material	Aluminum Alloy
Size	140*140*120(H) Φ90mm



Model NO.	A100-SENS
Power	7W/12W with PIR Sensor IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	0~180°
Lumen	50~60LM/W Ra>80
Color.T	WW/NW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	100*100*100mm



Model NO.	A120
Power	12W/20W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	0~180°
Lumen	50~60LM/W Ra>80
Color.T	WW/NW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	120*120*120mm



Model NO.	A100
Power	7W/12W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	0~180°
Lumen	50~60LM/W Ra>80
Color.T	WW/NW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	100*100*100mm



Model NO.	R-135
Power	7W/12W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	0~180°
Lumen	50~60LM/W Ra>80
Color.T	WW/NW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	135*100*115mm



Model NO.	A-04
Power	2*3W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	Up&Down
Lumen	80~90LM/W Ra>80
Color.T	WWWYY/B/R/G
Shell	Black+Black/Black+Golden(inner)
Material	Aluminum Alloy
Size	175*175*90mm



Model NO.	A06-6W	A06-14W
Power	2*3W COB IP65	2*7W COB IP65
Input voltage	AC85-265V 50/60HZ	AC85-265V 50/60HZ
Beam Angle	Up&Down	Up&Down
Lumen	80~90LM/W Ra>80	80~90LM/W Ra>80
Color.T	WWW/WWW	WWW/WWW
Shell	White/Black	White/Black
Material	Aluminum Alloy	Aluminum Alloy
Size	125*65*220(H)mm	125*65*220(H)mm



Model NO.	A170
Power	6*1W high power IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120° up&down
Lumen	100~110LM/W Ra>70
Color.T	WWW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	170*80*40mm



Model NO.	A220
Power	8*1W high power IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120° up&down
Lumen	100~110LM/W Ra>80
Color.T	WWW/WW
Shell	White/Black
Material	Aluminum Alloy
Size	220*90*50mm



Model NO.	R165-3W
Power	3W 2835SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	90°
Lumen	580~90LM/W Ra>80
Color.T	WWW
Shell	Black/Grey
Material	Aluminum Alloy
Size	Φ165*85mm



Model NO.	R165-10W
Power	10W 2835SMD IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	90°
Lumen	80~90LM/W Ra>80
Color.T	WWW
Shell	Black/Grey
Material	Aluminum Alloy
Size	Φ165*85mm



Model NO.	SLWL
Power	4W 2835SMD IP65
Beam Angle	360°
Lumen	High Lighting:480LM Low Lighting:80LM
Solar Panel	1.5W 5.5V
Battery	2200mAh; 3.7V it can last 20hrs when low lighting
Color.T	6000K
Material	Plastic

360° 360° Illuminate



Up and down adjustment 80°



Mode 1: People walk through to improve brightness




Mode 2: PM maintain medium brightness



Mode 3: Lights when people come, lights off when they leave






Model NO.	R110
Power	8W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	270°
Lumen	30~40LM/W Ra>70
Color.T	WWWY/R/G/B
Shell	White 360° Rotary
Material	Aluminum Alloy
Size	Φ110*120*165mm



Model NO.	A03
Power	2W/6W/14W IP65
Input voltage	AC85-265V 50/60HZ
Size(mm)	130*65*60 200*100*107 300*150*140
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW Shell:Black+Golden/White



Model NO.	A05
Power	6W IP65
Input voltage	AC85-265V 50/60HZ
Size	160*68*60mm
Lumen	80~90LM/W Ra>80
Color.T	WWWY/B/R/G/RGB Shell:Black

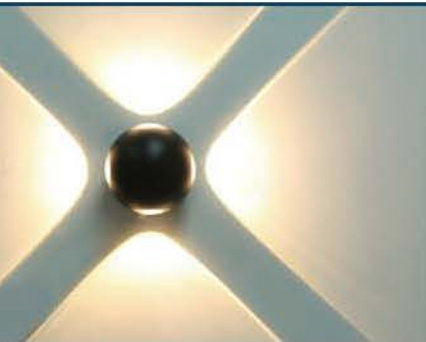

Model NO.	A01
Power	8W 4 face IP65
Input voltage	AC85-265V 50/60HZ
Size	Φ100*94mm
Lumen	80~90LM/W Ra>80
Color.T	WWWY/B/R/G Shell:Black



Model NO.	A02
Power	6W IP65
Input voltage	AC85-265V 50/60HZ
Size	Φ130*35mm
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW Shell:Black



Model NO.	A10
Power	3W/5W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120°
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW
Shell	Black
Material	Aluminum alloy
Size	80*83*63mm



Model NO.	A11
Power	2*3W/2*5W COB IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	120° Up&Down
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW
Shell	Black
Material	Aluminum alloy
Size	80*142*63mm





Model NO.	A13
Power	6W/12W/18W/24W/30W/36W IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	Up&Down
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW
Shell	Black/Grey
Material	Aluminum alloy
Size(mm)	Φ65*H160(6W) Φ90*H260(12W) Φ108*H300(18W/24W) Φ145*H300(30W/36W)



Model NO.	A12
Power	3W/6W/9W/12W/15W/18W IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	Up Or Down
Lumen	80~90LM/W Ra>80
Color.T	WWW/WWW
Shell	Black/Grey
Material	Aluminum alloy
Size(mm)	Φ65*H160(3W) Φ90*H160(6W) Φ108*H200(9W/12W) Φ145*H200(15W/18W)





Model NO.	A15
Power	6W/12W/18W/24W/30W/36W IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	Up&Down
Lumen	80~90LM/W Ra>80
Color.T	WWW/NW/W
Shell	Black/Grey
Material	Aluminum alloy
Size(mm)	63*63*H180(6W) 90*90*H250(12W) 120*120*H300(18W/24W) 150*150*H450(30W/36W)



Model NO.	A14
Power	3W/6W/9W/12W/15W/18W IP65
Input voltage	AC85-265V 50/60HZ
Beam Angle	Up Or Down
Lumen	80~90LM/W Ra>80
Color.T	WWW/NW/W
Shell	Black/Grey
Material	Aluminum alloy
Size(mm)	63*63*H120(3W) 90*90*H160(6W) 120*120*H200(9W/12W) 150*150*H260(15W/18W)





Model NO.	PB
Power	40W/60W/80W/100W
Input voltage	AC100-300V PF>0.98
Chip	84/84/96/120pcs PHILIPS 3030SMD
Beam Angle	180° IP65
Lumen	105~115LM/W Ra>80
Color.T	WW/NW/WW
Material	Aluminum+PC Cover
Size	361*235*187mm



Model NO.	PA
Power	20W/30W
Input voltage	AC100-300V PF>0.98
Chip	90pcs Sumsung 2835SMD
Beam Angle	180° IP65
Lumen	105~115LM/W Ra>80
Color.T	WW/NW/WW
Material	Aluminum+PC Cover
Size	234*153*93mm





A-16-3W

- ▶ Power:3W Single head
- ▶ Volt:AC85-285V 50/60HZ
- ▶ Beam Angle:120° IP65
- ▶ Lumen:80~90LM/W Ra>80
- ▶ Size:Φ63*120(H)mm
- ▶ Color:T:WWW/WW
- ▶ Shell:Silver
- ▶ Material:Stainless



A-16-6W

- ▶ 6W Double head
- ▶ Volt:AC85-285V 50/60HZ
- ▶ Beam Angle:Up&Down IP65
- ▶ Lumen:80~90LM/W Ra>80
- ▶ Size:Φ63*200(H)mm
- ▶ Color:T:WWW/WW
- ▶ Shell:Silver
- ▶ Material:Stainless

Wall Light Fixture(Don't include the bulbs)



Single-headed 1meter Wires



Single-headed lamp fixture



Single-headed lamp fixture



Double-headed lamp fixture



Three-headed lamp fixture



Four-headed lamp fixture



Five-headed lamp fixture

LED INDOOR WALL LIGHT



A-10-R

- Power: 5W COB IP44
- Volt: AC85-265V 50/60HZ
- The top part are rotatable
- Lumen: 280~300LM
- Size: $\Phi 145 \times 70$ mm
- Color: T: WWW/NWWW
- Shell: White/Black
- Material: Aluminum+PMMA



A-10-S

- Power: 5W COB IP44
- Volt: AC85-265V 50/60HZ
- The top part are rotatable
- Lumen: 280~300LM
- Size: $130 \times 130 \times 48$ mm
- Color: T: WWW/NWWW
- Shell: White/Black
- Material: Aluminum+PMMA



A-160-B

- Power: 7W COB IP44
- Volt: AC85-265V 50/60HZ
- Beam Angle: Up&Down
- Lumen: 70~80LM/W Ra>80
- Size: $160 \times 100 \times 85$ mm
- Color: T: WWW/NWWW
- Shell: White/Black
- Material: Aluminum alloy



A-160-S-PIR

- Power: 7W COB IP44
- Volt: AC85-265V 50/60HZ
- Beam Angle: Up & Down
- Lumen: 70~80LM/W Ra>80
- Size: $160 \times 100 \times 85$ mm
- Color: T: WWW/NWWW
- Shell: White/Black
- Material: Aluminum alloy



A-170

- Power: 3W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 30° IP44
- Lumen: 70~80LM/W Ra>80
- Size: $170 \times 70 \times 60$ mm
- Color: T: WWW/NWWW
- Shell: Black/White/Golden/Silver
- Material: Aluminum alloy
- the spot part can be rotary



AL-50



- Power: 2W/6W high power
- Volt: AC85-265V 50/60HZ
- Beam Angle: 180° IP44
- Lumen: 70~80LM/W Ra>80
- Size: $50 \times 35 \times 80$ mm
- Color: T: WWW/R/G/B/Y/P
- Shell: Silver/Black
- Material: Aluminum alloy





PS



PR

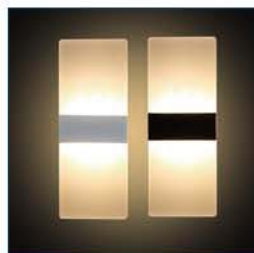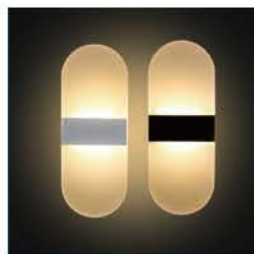


Dimensions:(cm)




Model NO.	Power	Volt	Bearn Angle	Lumen	Color.T	Shell	Size	Material
PS140	3W 2835SMD	AC85-265V	180° IP44	160~180LM	WWW/NW/W	White/Black	140*60*33.5mm	PMMA(Acrylic)
PS220	4W 2835SMD	AC85-265V	180° IP44	220~240LM	WWW/NW/W	White/Black	220*110*33.5mm	PMMA(Acrylic)
PS290	6W 2835SMD	AC85-265V	180° IP44	280~300LM	WWW/NW/W	White/Black	290*110*33.5mm	PMMA(Acrylic)
PS400	12W 2835SMD	AC85-265V	180° IP44	420~480LM	WWW/NW/W	White/Black	400*160*33.5mm	PMMA(Acrylic)
PR140	3W 2835SMD	AC85-265V	180° IP44	180~200LM	WWW/NW/W	White/Black	140*60*33.5mm	PMMA(Acrylic)
PR220	4W 2835SMD	AC85-265V	180° IP44	220~240LM	WWW/NW/W	White/Black	220*110*33.5mm	PMMA(Acrylic)
PR290	6W 2835SMD	AC85-265V	180° IP44	280~300LM	WWW/NW/W	White/Black	290*110*33.5mm	PMMA(Acrylic)



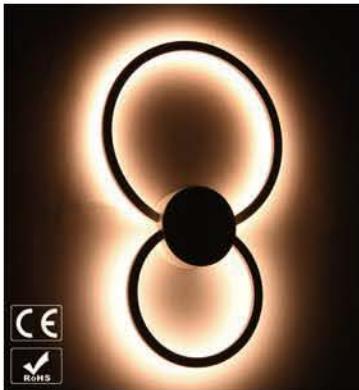

S20WA

- Power:20W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:432*41*260mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- inward-Circle light

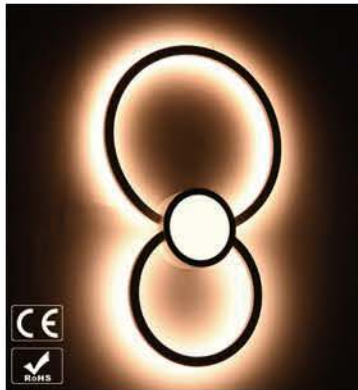


S24WA

- Power:24W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:432*41*260mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- inward-Circle+centre-face light



S20WB

- Power:20W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:432*41*260mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- outward-Circle light

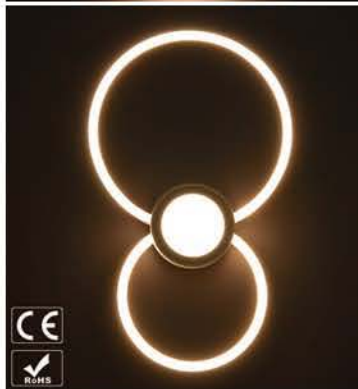

S24WB

- Power:24W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:432*41*260mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- outward-Circle+centre-face light



S20W

- Power:20W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:353*41*353mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- inward-Circle light



S24W

- Power:24W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:353*41*353mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- inward-Circle+centre-face light



F20W

- Power:20W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:353*41*353mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- outward-Circle light



F24W



- Power:24W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:360° IP44
- Lumen:50~60LM/W Ra>80
- Size:353*41*353mm
- Color.T:3000K
- Shell:White
- Material:Aluminum alloy
- outward-Circle+centre-face light






A2R-3W

- Power:3W COB
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:160*100*95mm
- Color.T:WW/W
- Shell:White
- Material:Aluminum alloy

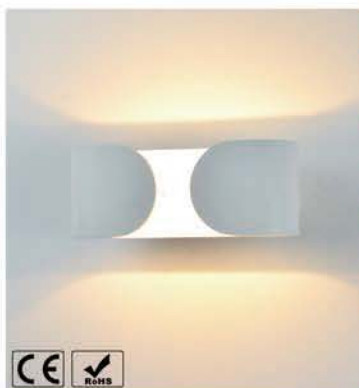

A2R-6W

- Power:2*3W COB
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:160*70*90mm
- Color.T:WW/W
- Shell:White
- Material:Aluminum alloy



AS1-3W

- Power:3W COB
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:100*100*80mm
- Color.T:WW/W
- Shell:White/Black
- Material:Aluminum alloy




AS1-7W

- Power:7W COB
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:100*100*80mm
- Color.T:WW/W
- Shell:White/Black
- Material:Aluminum alloy



AS2-7W

- Power:7W SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:200*100*80mm
- Color.T:WW/W
- Shell:White
- Material:Aluminum alloy




AS3-7W

- Power:7W SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:300*100*80mm
- Color.T:WW/W
- Shell:White
- Material:Aluminum alloy



AS37-7W

- Power:20W 2835SMD
- Volt:AC85-265V 50/60HZ
- Beam Angle:180° IP44
- Lumen:70~80LM/W Ra>80
- Size:370*100*80mm
- Color.T:WW/W
- Shell:White
- Material:Aluminum alloy



AS6-5W

- Power:5W COB
- Volt:AC85-265V 50/60HZ
- Beam Angle:60° IP44
- Lumen:70~80LM/W Ra>80
- Size:65*90*78mm
- Color.T:WW/NW/W
- Shell:White/Black
- Material:Aluminum alloy





R01

- Power:20W/30W/40W
- Chip:2835SMD Samsung
- LED Quantity:120/150/200
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:Φ300*85mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R05

- Power:20W/30W/40W
- Chip:2835SMD Samsung
- LED Quantity:120/150/200
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:Φ300*95mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R01

- Power:20W/30W/40W
- Chip:2835SMD Samsung
- LED Quantity:120/150/200
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:300*300*90mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R02

- Power:20W
- Chip:2835SMD Samsung
- LED Quantity:120pcs
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:Φ275*80mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R03

- Power:20W
- Chip:2835SMD Samsung
- LED Quantity:120pcs
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:Φ275*90mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R04

- Power:20W
- Chip:2835SMD Samsung
- LED Quantity:120pcs
- Volt:AC85-265V PF>0.9
- Beam Angle:120~140° IP65
- Lumen:80LM/W Ra>80
- Size:Φ275*90mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey
- Can be installed Sensor or Emergency



R07

- Power:20W/30W/40W/50W
- Chip:2835SMD 0.5W osram
- LED Quantity:120 PF>0.9
- Volt:AC175-265V Lifud Driver
- Beam Angle:120~140° IP65
- Lumen:110LM/W Ra>80
- Size:Φ275*85mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey



R08

- Power:20W/30W/40W
- Chip:2835SMD 0.5W osram
- LED Quantity:120 PF>0.9
- Volt:AC175-265V Lifud Driver
- Beam Angle:120~140° IP65
- Lumen:110LM/W Ra>80
- Size:Φ300*90mm
- Color.T:WWW/WWW
- Material:Aluminum+PC Cover
- Shell:Black/White/Grey



LED YARD LAWN LIGHT





Model NO.	Size(mm)	Description
C100-300H-7W	160*50*(H)300	<ul style="list-style-type: none"> ▪ Power:7W/10W COB ▪ Volt:AC85-265V 50/60HZ ▪ Beam Angle:360° IP65 ▪ Lumen:80~90LM/W Ra>80 ▪ Color:T:3000K ▪ Shell:Black/Grey ▪ Material:Aluminum alloy
C100-300H-10W	160*50*(H)300	
C100-600H-7W	160*50*(H)600	
C100-600H-10W	160*50*(H)600	



Model NO.	Size(mm)	Description
C112-300H-7W	110*110*(H)300	<ul style="list-style-type: none"> ▪ Power:7W/10W COB ▪ Volt:AC85-265V 50/60HZ ▪ Beam Angle:360° IP65 ▪ Lumen:80~90LM/W Ra>80 ▪ Color:T:3000K ▪ Shell:Black/Grey ▪ Material:Aluminum alloy
C112-300H-10W	110*110*(H)300	
C112-600H-7W	110*110*(H)600	
C112-600H-10W	110*110*(H)600	



Model NO.	Size(mm)	Description
C124-300H-7W	Φ105*(H)256 Bottom Dia:Φ150	<ul style="list-style-type: none"> ▪ Power:7W/10W COB ▪ Volt:AC85-265V 50/60HZ ▪ Beam Angle:360° IP65 ▪ Lumen:80~90LM/W Ra>80 ▪ Color:T:3000K ▪ Shell:Black/Grey ▪ Material:Aluminum alloy
C124-300H-10W	Φ105*(H)256 Bottom Dia:Φ150	
C124-600H-7W	Φ105*(H)600 Bottom Dia:Φ150	
C124-600H-10W	Φ105*(H)600 Bottom Dia:Φ150	



C160-400H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: $\Phi 90*(H)400*\Phi 90$ mm
- Color: T:3000K
- Shell: Black
- Material: Aluminum alloy




C160-600H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: $\Phi 90*(H)600*\Phi 90$ mm
- Color: T:3000K
- Shell: Black
- Material: Aluminum alloy



C155-500H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: 130*30*(H)500mm
- Color: T:3000K
- Shell: Sand White/Black
- Material: Aluminum alloy

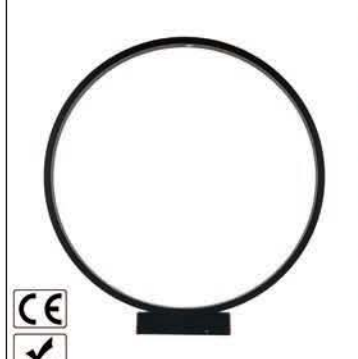

C185-600D-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: $\Phi 600$ Box 200*44*45mm
- Color: T:3000K
- Shell: Black
- Material: Aluminum alloy



C172-460H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: Top $\Phi 170*\Phi 90*460$ mm
- Color: T:3000K
- Shell: Coffee
- Material: Aluminum alloy



C173-510H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: Top $\Phi 300*\Phi 230*510$ mm
- Color: T:3000K
- Shell: Black
- Material: Aluminum alloy



C195-146H-4W

- Power: 4*1W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: $\Phi 149*H146$ mm
- Color: T:3000K
- Shell: Sand White/Black
- Material: Aluminum alloy



C205-380H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: H380 Top $\Phi 73*\Phi 125$ mm
- Color: T:3000K
- Shell: Coffee
- Material: Aluminum alloy



C136-300H-12W

- Power: 12W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: 300* ϕ 120*B ϕ 150mm
- Color: T:3000K
- Shell: Black/Grey
- Material: Aluminum alloy



C136-600H-12W

- Power: 12W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: 600* ϕ 120*B ϕ 150mm
- Color: T:3000K
- Shell: Black/Grey
- Material: Aluminum alloy



C148-600H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: H600* ϕ 93mm
- Color: T:3000K
- Shell: Black/Grey
- Material: Aluminum alloy



C149-600H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: H600*116*116mm
- Color: T:3000K
- Shell: Black/Grey
- Material: Aluminum alloy



C152-600H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: 100*32*(H)600mm
- Color: T:3000K
- Shell: Sand Black
- Material: Aluminum alloy



C153-600H-7W

- Power: 7W COB
- Volt: AC85-265V 50/60HZ
- Beam Angle: 360° IP65
- Lumen: 80~90LM/W Ra>80
- Size: 100*32*(H)600mm
- Color: T:3000K
- Shell: Sand Black
- Material: Aluminum alloy





L-1WA

- Power: 1W
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90° IP30
- Lumen: 40~50LM/W
- Size: 95*95*32mm
- Open hole: 86*86mm
- Color: T:3000K
- Shell: White/Silver/Golden
- Material: Anti-fire PC



LS-1WA

- Power: 1W with IR Sensor
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90° IP30
- Lumen: 40~50LM/W
- Size: 95*95*32mm
- Open hole: 86*86mm
- Color: T:3000K
- Shell: White/Silver/Golden
- Material: Anti-fire PC



L-1.5WB

- Power: 1.5W
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90° IP30
- Lumen: 40~50LM/W
- Size: 86*86*30mm
- Open hole: 86*86mm
- Color: T:3000K
- Shell: White/Golden
- Material: Anti-fire PC



LS-1.5WB

- Power: 1.5W with IR Sensor
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90° IP30
- Lumen: 40~50LM/W
- Size: 86*86*30mm
- Open hole: 86*86mm
- Color: T:3000K
- Shell: White/Golden
- Material: Anti-fire PC




L05-3W

- Power: 3W COB IP65
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90°
- Lumen: 70~80LM/W
- Size: 84*84*29mm
- Open hole: 65*65mm
- Color: T:3000K
- Shell: White/Black/Grey
- Material: Aluminum alloy



L06/L07

- Power: 3W IP65
- Volt: AC85-265V 50/60HZ
- Beam Angle: 90°
- Lumen: 60~80LM/W
- Size: 160*96*64mm
- Open hole: 160*96
- Color: T:3000K
- Shell: Horizontal/Vertical
- Material: Anti-fire PC

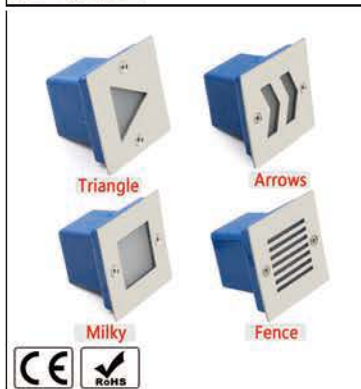

L01-1W L04-3W

- Power: 1W/3W IP65
- Volt: AC85-265V 50/60HZ
- Beam Angle: 180°
- Lumen: 60~80LM/W
- Size: 1W: 70*70*55mm
3W: 105*105*55mm
- Open hole: 1W: 60*60mm
3W: 95*95mm
- Color: T:3000K
- Shell: Milky, fence, Arrows, Triangle
- Material: Aluminum+Stainless cover



L03-2W L04-3W

- Power: 2W/3W IP65
- Volt: AC85-265V 50/60HZ
- Beam Angle: 180°
- Lumen: 60~80LM/W
- Size: 2W: 110*45*55mm
3W: 170*70*55mm
- Open hole: 1W: 100*40mm
3W: 155*55mm
- Color: T:3000K
- Shell: Milky, fence, Arrows, Triangle
- Material: aluminum+stainless cover

LED POOL LIGHT





P245-9W/12W

- Power: 9W/12W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 245 \times 50$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: plastic + Silica glue
- Installing: wall hanging



P295-15W/18W

- Power: 15/18W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 295 \times 60$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: plastic + Silica glue
- Installing: wall hanging



P260-12W/15W

- Power: 12/15W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 260 \times 60$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: plastic + Silica glue
- Installing: wall hanging



P230-S9/12/15W

- Power: 9/12/15W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 230 \times 45$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: 304 Stainless + PC cover
- Installing: wall hanging
- Color of side sheet: blue/white



P290-S18W/24W

- Power: 18/24W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 290 \times 65$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: 304 Stainless + PC cover
- Installing: wall hanging
- Color of side sheet: blue/white



R56-12/18/24W

- Power: 12/18/24W HP Episatr
- Volt: AC/DC 12-24V
- Lumen: 90~100LM/W
- Size: $\Phi 178 \times 83$ mm
- SIP Rate: IP68
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: 304 Stainless + PC cover
- Installing: recessed



D20

- Power: 9W 3030 SMD
- Volt: DC 12V
- Lumen: 90~100LM/W
- Size: $\Phi 125 \times 30$ mm
- SIP Rate: IP68 1.5m wires
- Color. T: 2700~6500K, R, G, B, R, G, B
- Material: plastic D20 Screw
- Installing: recessed





☎ Phone : +370-600-93111

✉ E-mail : info@ledesta.eu

www.ledesta.eu