


RW-F10.2-B

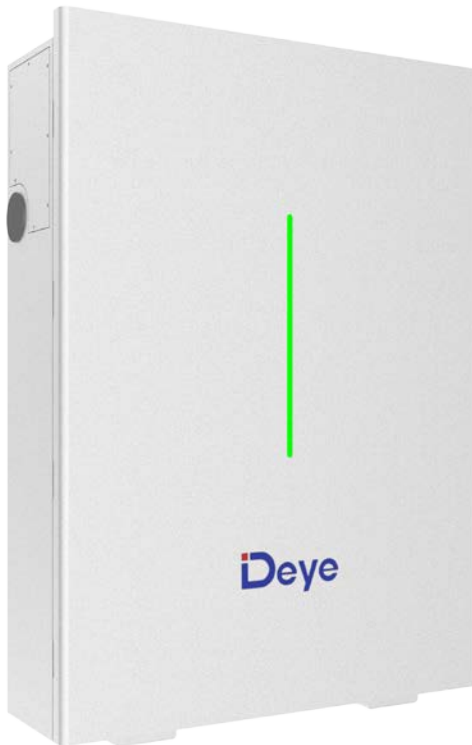

◆ Safer

Cobalt Free Lithium Iron Phosphate (LFP) Battery, safety and long lifespan and high-energy density. Low Voltage safety connection.

◆ High performance

Maximum support 1C charge and 1.25C discharge.
Maximum 6000 cycles at 90% DOD, and 10 years standard warranty.

◆ Reliable

Built-in Intelligent BMS, providing complete protection. Natural cooling, IP65, wide temperature range: $-4^{\circ}\text{F} \sim 131^{\circ}\text{F}$ (-20°C to 55°C).

◆ Flexible

Modular design, easy to expand, Supports hand-in-hand rapid parallel expansion, Max. 32 units in parallel, Max. capacity of 327kWh. Suited to residential and commercial applications for increasing the self-consumption ratio.

◆ Convenient

Battery module auto networking (No DIP switch code), easy maintenance, support Deye remotely monitoring and upgrade. Also supports Deye inverters to form a stack all-in-one system.

◆ Eco-Friendly

Use environmental protection materials, the whole module non-toxic, pollution-free.

◆ Two Mounting Methods

Flat design, Wall-mounted with Wall Bracket, Floor Stand with removable base, saving installation space.



Stock Code: 605117.SH

Model		RW-F10.2-B
Main Parameter		
Battery Chemistry	LiFePO ₄	
Built-in Circuit Breaker	125A 4P, 60Vdc	
Capacity (Ah)	200	
Scalability	Max. 32 pcs pack (Max.327kWh) in parallel	
Nominal Voltage (V)	51.2	
Operating Voltage(V)	43.2~57.6	
Nominal Energy (kWh)	10.24	
Usable Energy (kWh) ^[1]	9.2	
Charge/Discharge Current (A) ^[2]	Recommend	Charge: 100 / Discharge: 100
	Max.	Charge: 198 / Discharge: 240
	Peak(2mins,25°C)	300
Other Parameter		
Recommend Depth of Discharge	90%	
Dimension (W×H×D)	23.6"×32.7"×7.9" (600×830×200mm, Without hanging board)	
Weight Approximate	235.9 lbs. (107kg)	
Master LED Indicator	LED(SOC:20%~SOC100% and working state)	
IP Rating of Enclosure	NEMA 3R (IP65)	
Operating Temperature	Charge: 33°F ~131°F (1~55°C) / Discharge: -4°F ~131°F (-20°C~55°C)	
Recommend Operating Temperature	59°F ~95°F (15°C~35°C)	
Storage Temperature	32°F ~95°F (0~35°C)	
Humidity	5%~95%	
Altitude	≤Max. 9,843 ft (3,000m)	
Cycle Life	≥6000(25°C±2°C,0.5C/0.5C,90%DOD,70%EOL)	
Installation	Wall-Mounted, Floor-Mounted	
Communication Port	CAN2.0, RS485	
Warranty Period ^[3]	10 years	
Energy Throughput	32MWh(@25°C, 0.5C/0.5C, 70%EOL)	
Certification	UN38.3, FCC, UL1973, UL9540A	

[1] DC Usable Energy, test conditions: 90% DOD, 0.5C charge & discharge at 25°C. System usable energy may vary due to system configuration parameters.

[2] The current is affected by temperature and SOC.

[3] Conditions apply, refer to Deye Warranty Letter.

Introduction

This series lithium iron phosphate battery is one of new energy storage products developed and produced by Deye, it can be used to support reliable power for various types of equipment and systems.

This series is especially suitable for application scene of high power, limited installation space, restricted load-bearing and long cycle life.

This series has built-in BMS battery management system, which can manage and monitor cells information including voltage, current and temperature. What's more, BMS can balance cells charging to extend cycle life. Multiple batteries can connect in parallel for larger capacity and longer power supporting.



Left view



Front view



Right view



Top view

System Topology Reference

