

HYUNDAI SOLAR MODULE



G12 PERC Shingled

HiE-S410DG(FB) HiE-S415DG(FB)
HiE-S420DG(FB)



Shingled
Technology



For Both Residential
& Commercial
Applications



More Power
Generation
In Low Light



G12 PERC Shingled

G12 PERC Shingled Technology provides ultra-high efficiency with better performance in low irradiation. Maximizes installation capacity in limited space.



Mechanical Strength

Tempered glass and reinforced frame design withstand rigorous weather conditions such as heavy snow and strong wind.



Reliable Warranty

Global brand with powerful financial strength provide reliable 25-year warranty.
(Australia and Europe Only)



UL / VDE Test Labs

Hyundai's R&D center is an accredited test laboratory of both UL and VDE.

Hyundai's Warranty Provisions



- **25-Year Product Warranty**
 - On material and workmanship

Australia and Europe Only



- **25-Year Performance Warranty**
 - Initial year: 98.0%
 - Linear warranty after second year:
with 0.55% annual degradation,
84.80% is guaranteed up to 25 years

About Hyundai Energy Solutions Co., Ltd

Established in 1972, Hyundai Heavy Industries Group is one of the most trusted names in the heavy industries sector and is a Fortune 500 company. As a global leader and innovator, Hyundai Heavy Industries is committed to building a future growth engine by developing and investing heavily in the field of renewable energy.

As a core energy business entity of HHI, Hyundai Energy Solutions has strong pride in providing High-quality PV products to more than 3,000 customers worldwide.

Certification



Electrical Characteristics

		Mono-Crystalline Module (HiE-S__DG(FB))		
		410	415	420
Nominal Output (Pmpp)	W	410	415	420
Open Circuit Voltage(Voc)	V	41.4	41.5	41.6
Short Circuit Voltage (Isc)	A	12.65	12.80	12.92
Voltage at Pmax (Vmpp)	V	34.4	34.4	34.5
Cuurent at Pmax (Impp)	A	11.97	12.08	12.19
Module Efficiency	%	20.6	20.9	21.1
Cell Type	-	PERC Mono-Crystalline Silicon Shingled		
Maximum System Voltage	V	1,500		
Temperature Coefficient of Pmax %/°C		-0.34		
Temperature Coefficient of Voc %/°C		-0.27		
Temperature Coefficient of Isc %/°C		0.04		

*All data at STC(Standard Test Conditions). Above data may be changed without prior notice.

*Tolerance of Pmax: ±5W.


*Measuring uncertainty of power: ±3%.

* Performance deviation of Voc [V], Isc [A], Vm[V] and Im[A]: ±3%.

Mechanical Characteristics

Dimensions	1,812 × 1,096× 30 mm (L × W × H)		
Weight	20.8kg		
Solar Cells	305 Cells, PERC Mono-crystalline Shingled (210 × 210mm)		
Output Cables	4mm ² ,+500mm/-1100mm(Vertical), +220mm/-180mm(Horizontal)	Connector	Stäubli : MC4-Evo2
Junction Box	IP68, TUV&UL, two diodes		
Construction	Front Glass: AR Coated tempered glass, 3.2mm Encapsulation: EVA (Ethylene-Vinyl-Acetate)		
Frame	Anodized Aluminum		

Module Diagram (Unit: mm)

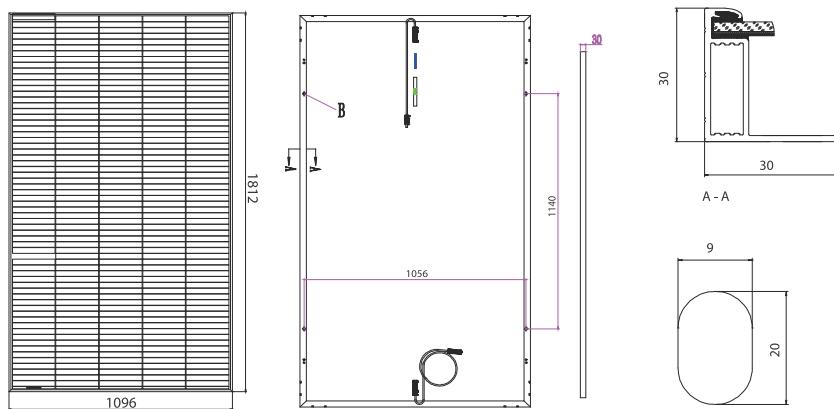


Installation Safety Guide

- Only qualified personnel should install or perform maintenance.
- Be aware of dangerous high DC voltage.
- Do not damage or scratch the rear surface of the module.
- Do not handle or install modules when they are wet.

Nominal Operating Cell Temperature	42.3°C (±2°C)
Operating Temperature	-40 ~ 85 °C
Maximum System Voltage	DC 1,500 / 1,000 (IEC)
Fire Rating	Class C
Series Fuse Rating [A]	25
Maximum Surface Load Capacity	Front 5,400 Pa Rear 2,400 Pa

I-V Curves

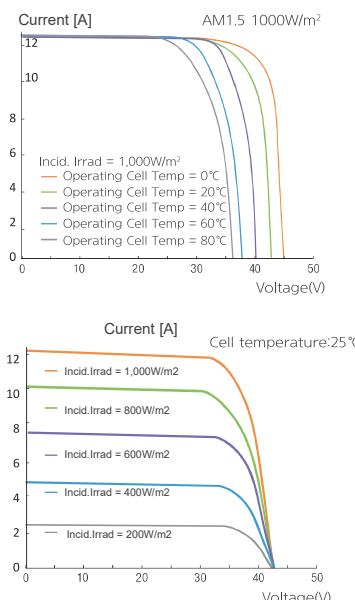

Manufactured in China

HYUNDAI
ENERGY SOLUTIONS



Printed on FSC certified
eco-friendly paper.

Sales & Marketing
sales@hyundai-es.co.kr

Printed Date : 07/2022