



Mono

410W MBB Half-Cell Module JAM72S10 390-410/MR Series

Introduction

Assembled with multi-busbar PERC cells, the half-cell configuration of the modules offers the advantages of higher power output, better temperature-dependent performance, reduced shading effect on the energy generation, lower risk of hot spot, as well as enhanced tolerance for mechanical loading.



Higher output power



Lower LCOE




Less shading and lower resistive loss



Better mechanical loading tolerance

Superior Warranty

- 12-year product warranty
- 25-year linear power output warranty

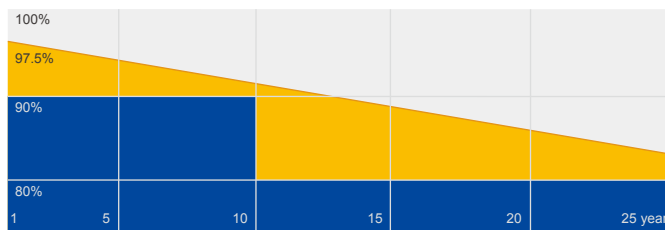


■ JA Linear Power Warranty ■ Industry Warranty

Comprehensive Certificates

- IEC 61215, IEC 61730
- ISO 9001: 2015 Quality management systems
- ISO 14001: 2015 Environmental management systems
- OHSAS 18001: 2007 Occupational health and safety management systems
- IEC TS 62941: 2016 Terrestrial photovoltaic (PV) modules – Guidelines for increased confidence in PV module design qualification and type approval



MECHANICAL DIAGRAMS

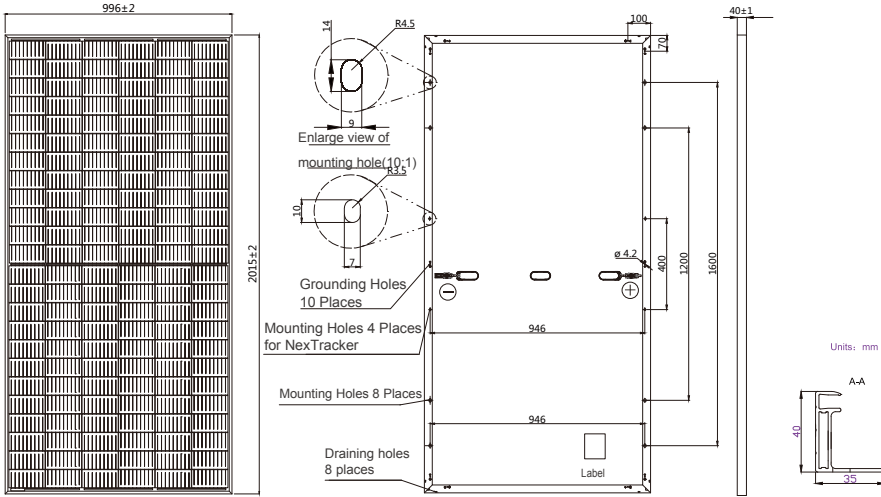

Remark: customized frame color and cable length available upon request

SPECIFICATIONS

| | |
|------------------------------------|--|
| Cell | Mono |
| Weight | 22.7kg±3% |
| Dimensions | 2015±2mm×996±2mm×40±1mm |
| Cable Cross Section Size | 4mm ² |
| No. of cells | 144 (6×24) |
| Junction Box | IP68, 3 diodes |
| Connector | QC 4.10-35 |
| Cable Length (Including Connector) | Portrait: 300mm(+)/400mm(-); Landscape: 1200mm(+)/1200mm(-) |
| Packaging Configuration | 27 Per Pallet |

ELECTRICAL PARAMETERS AT STC

| TYPE | JAM72S10 -390/MR | JAM72S10 -395/MR | JAM72S10 -400/MR | JAM72S10 -405/MR | JAM72S10 -410/MR |
|--|---|---------------------|---------------------|---------------------|---------------------|
| Rated Maximum Power(Pmax) [W] | 390 | 395 | 400 | 405 | 410 |
| Open Circuit Voltage(Voc) [V] | 49.01 | 49.30 | 49.58 | 49.86 | 50.12 |
| Maximum Power Voltage(Vmp) [V] | 40.71 | 41.02 | 41.33 | 41.60 | 41.88 |
| Short Circuit Current(Isc) [A] | 10.23 | 10.28 | 10.33 | 10.39 | 10.45 |
| Maximum Power Current(Imp) [A] | 9.58 | 9.63 | 9.68 | 9.74 | 9.79 |
| Module Efficiency [%] | 19.4 | 19.7 | 19.9 | 20.2 | 20.4 |
| Power Tolerance | 0~+5W | | | | |
| Temperature Coefficient of Isc(α _{Isc}) | +0.044%/°C | | | | |
| Temperature Coefficient of Voc(β _{Voc}) | -0.272%/°C | | | | |
| Temperature Coefficient of Pmax(γ _{Pmp}) | -0.350%/°C | | | | |
| STC | Irradiance 1000W/m ² , cell temperature 25°C, AM1.5G | | | | |

Remark: Electrical data in this catalog do not refer to a single module and they are not part of the offer. They only serve for comparison among different module types.
*For NexTracker installations static loading performance: front load measures 2400Pa, while back load measures 2400Pa.

ELECTRICAL PARAMETERS AT NOCT


| TYPE | JAM72S10 -390/MR | JAM72S10 -395/MR | JAM72S10 -400/MR | JAM72S10 -405/MR | JAM72S10 -410/MR |
|--------------------------------|---|---------------------|---------------------|---------------------|---------------------|
| Rated Max Power(Pmax) [W] | 294 | 298 | 302 | 306 | 310 |
| Open Circuit Voltage(Voc) [V] | 45.90 | 46.15 | 46.41 | 46.66 | 46.91 |
| Max Power Voltage(Vmp) [V] | 38.15 | 38.40 | 38.65 | 38.90 | 39.16 |
| Short Circuit Current(Isc) [A] | 8.15 | 8.20 | 8.25 | 8.31 | 8.36 |
| Max Power Current(Imp) [A] | 7.71 | 7.76 | 7.81 | 7.87 | 7.92 |
| NOCT | Irradiance 800W/m ² , ambient temperature 20°C, wind speed 1m/s, AM1.5G | | | | |

OPERATING CONDITIONS


| | |
|----------------------------|---------------------|
| Maximum System Voltage | 1000V/1500V DC(IEC) |
| Operating Temperature | -40°C~+85°C |
| Maximum Series Fuse | 20A |
| Maximum Static Load,Front* | 5400Pa |
| Maximum Static Load,Back* | 2400Pa |
| NOCT | 45±2°C |
| Application Class | Class A |

CHARACTERISTICS

Current-Voltage Curve JAM72S10-405/MR

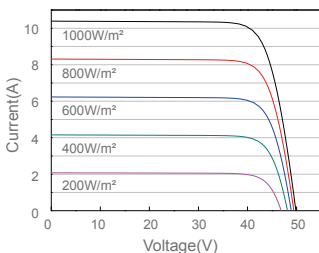

Power-Voltage Curve JAM72S10-405/MR

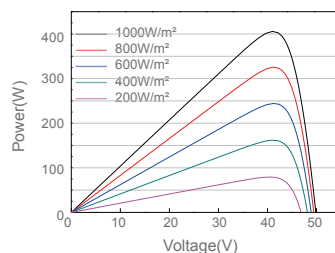

Current-Voltage Curve JAM72S10-405/MR

